


CURB MOUNT SKYLIGHT

MODEL CMDD

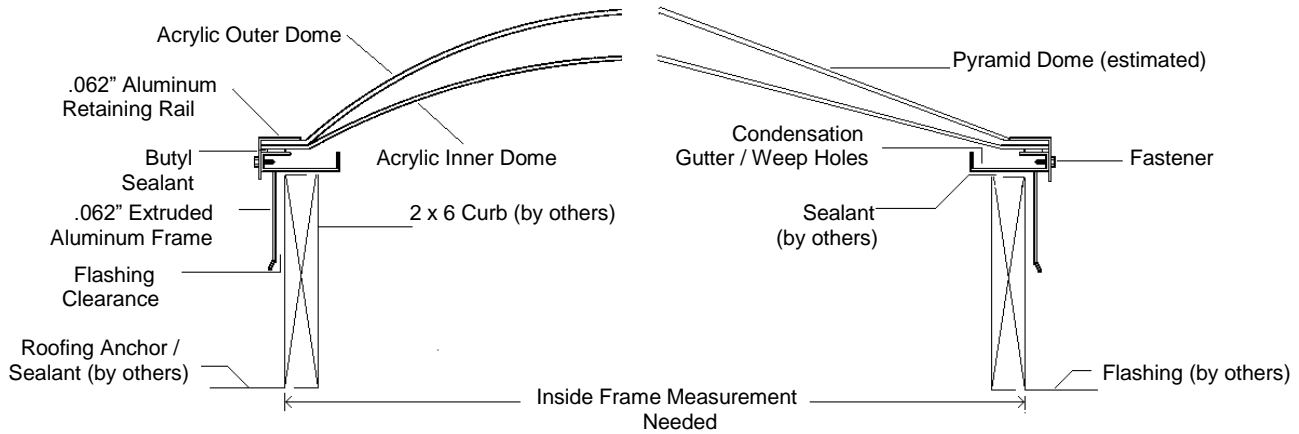

(Inside frame measurement = Outside Curb Dimension + All Roof Work & Flashing + .375\" - .500\" Flashing Clearance)

SPECIFICATIONS:: Curb Mount Double Domed Skylights shall be manufactured by LBK Skylight Manufacturing. Each skylight shall be factory assembled with thermoformed acrylic in either 0.118\" over 0.118\" acrylic (standard duty), 0.187\" over 0.118\" (commercial duty) 0.177\" 100%DR Impact Modified acrylic over 0.177\" acrylic (Fall Protection) or 0.118\" polycarbonate over 0.118\" acrylic. Estimated as either 2447 white over clear or 2412 bronze over clear. Frames shall be .062\" extruded aluminum (6063-T5) with welded corners and an integral condensation gutter. Finish shall be natural aluminum (mill). Fall protection skylights' rails are 6063-T5 aluminum 0.125\" thick. Skylight is designed and manufactured to meet or exceed standard of 40 psf live load and 20psf (uplift).
ALL UNITS ARE GUARANTEED AGAINST DEFECTIVE WORKMANSHIP AND MATERIAL.

DOME PLACEMENT	MATERIAL				COLOR				DOME	
	ACRYLIC	CD	FALL PROTECT	POLY	WHITE	BRONZE	CLEAR	CUSTOM COLOR	DOMED	PYRAMID
OUTER										
INNER										
THIRD										

SKYLIGHT FRAME FINISH
<input type="checkbox"/> NATURAL ALUMINUM (MILL)
<input type="checkbox"/> BRONZE PAINT
<input type="checkbox"/> CUSTOM COLOR _____

CUSTOM SHAPES AVAILABLE	
<input type="checkbox"/> TRIANGLE	<input type="checkbox"/> PENTAGON
<input type="checkbox"/> HEXAGON	<input type="checkbox"/> OCTAGON
<input type="checkbox"/> ROUND	<input type="checkbox"/>

QTY	INSIDE FRAME MEASUREMENT

THIS FORM IS FOR CURB MOUNT SKYLIGHTS WHEN YOU WILL BE MAKING THE CURBS AND FLASHING OR USING EXISTING CURBS AND FLASHING--INSIDE FRAME MEASUREMENT REQUIRED. INSIDE FRAME HAS TO BE BIG ENOUGH TO FIT OVER CURB, FLASHING AND ALL ROOF WORK + 1/2\" FLASHING CLEARANCE.

NOTES
FOR TPO ROOFS—YOU MIGHT ALLOW FOR A LITTLE BIT EXTRA IF YOU ARE ADDING MORE TO THE CURB
WE ALWAYS GO BY THE INSIDE FRAME MEASUREMENT, BUT THE DIFFERENCE BETWEEN THE INSIDE AND THE OUTSIDE WOULD BE ABOUT 1/8\"

PROJECT NAME	PO / Job #	LEAD TIME (IN BUSINESS DAYS)	TODAY'S DATE
PROJECT DELIVERY ADDRESS	CITY / STATE / ZIP	SITE CONTACT / PHONE	
REQUESTED BY	PHONE	COMPANY	
ADDRESS	CITY / STATE / ZIP	APPROVAL SIGNATURE	