




**FALL PROTECTION CURB MOUNT SKYLIGHT**

**MODEL CMFP**

**TESTED TO MEET OR EXCEED OSHA STANDARDS-29 CFR 1910.23 (E) (8)**

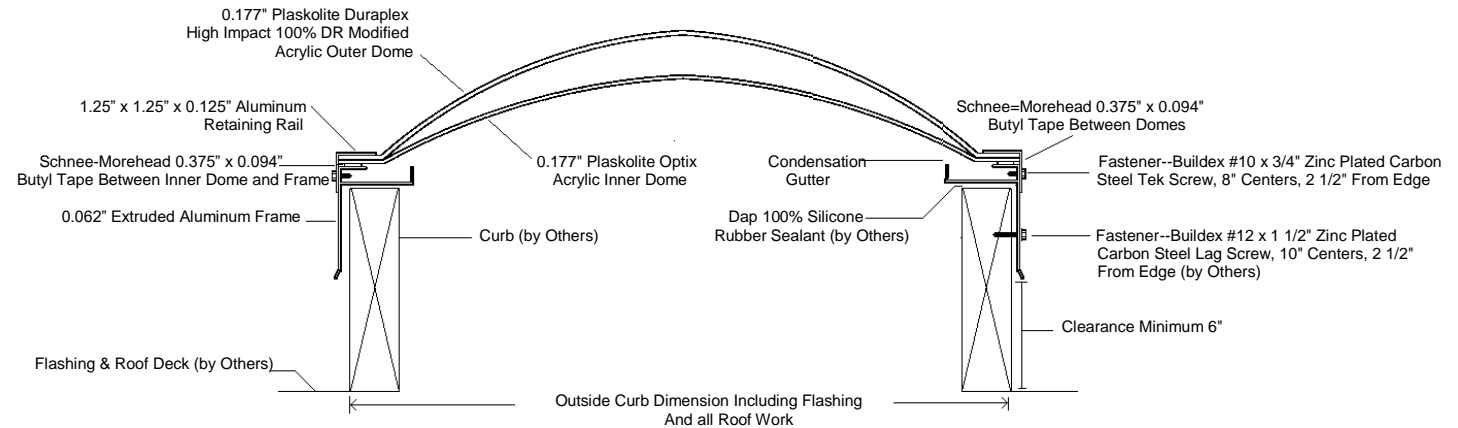

**SPECIFICATIONS:** Curb Mount Double Domed Skylights as manufactured by LBK Skylight Manufacturing [(800) 390-2301]. Each skylight shall be factory assembled with clear, thermoformed, 0.177", Duraplex®, 100% DR impact modified acrylic outer dome. Inner dome to be 0.177" Optix® acrylic in 2447 white, 2412 bronze or clear. Some sizes may have color an/or Frames shall be 0.062" extruded aluminum (6063-T5) with welded corners and an integral condensation gutter. Retaining rail to be welded (6063-T5) 0.125" extruded aluminum. Frame and rail finish shall be natural aluminum (mill), bronze or custom color. Skylight is manufactured to meet or exceed standard of 40 psf live load and 20psf (uplift). TESTED TO MEET OR EXCEED OSHA FALL PROTECTION REGULATIONS-29 CFR 1910.23 (E) (8).

DOME PLACEMENT	MATERIAL	THICKNESS	TYPE	COLOR				DOME	
				WHITE	BRONZE	CLEAR	CUSTOM COLOR	DOMED	PYRAMID
OUTER	100% DR IMPACT MODIFIED ACRYLIC	0.177"	FALL PROTECTION	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>
INNER	ACRYLIC	0.177"		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>
THIRD				<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	--

SKYLIGHT FRAME FINISH
<input type="checkbox"/> NATURAL ALUMINUM (MILL)
<input type="checkbox"/> BRONZE PAINT
<input type="checkbox"/> CUSTOM COLOR _____

CUSTOM SHAPES AVAILABLE	
<input type="checkbox"/> TRIANGLE	<input type="checkbox"/> PENTAGON
<input type="checkbox"/> HEXAGON	<input type="checkbox"/> OCTAGON
<input type="checkbox"/> ROUND	<input type="checkbox"/>

QTY	INSIDE FRAME MEASUREMENT

THIS FORM IS FOR CURB MOUNT FALL PROTECTION SKYLIGHTS WHEN YOU WILL BE MAKING THE CURBS AND FLASHING OR USING EXISTING CURBS AND FLASHING--INSIDE FRAME MEASUREMENT REQUIRED. INSIDE FRAME HAS TO BE BIG ENOUGH TO FIT OVER CURB, FLASHING AND ALL ROOF WORK + 1/2" FLASHING CLEARANCE.

NOTES

PROJECT NAME	PO / JOB #	LEAD TIME (IN BUSINESS DAYS)	TODAY'S DATE
PROJECT DELIVERY ADDRESS	CITY / STATE / ZIP	SITE CONTACT / PHONE	
REQUESTED BY	PHONE	COMPANY	
ADDRESS	CITY / STATE / ZIP	APPROVAL SIGNATURE	