


**CORRUGATED POLYCARBONATE OR FIBERGLASS REINFORCED PLASTIC SKYLIGHT PANELS
(CUSTOM PROFILES AVAILABLE)**

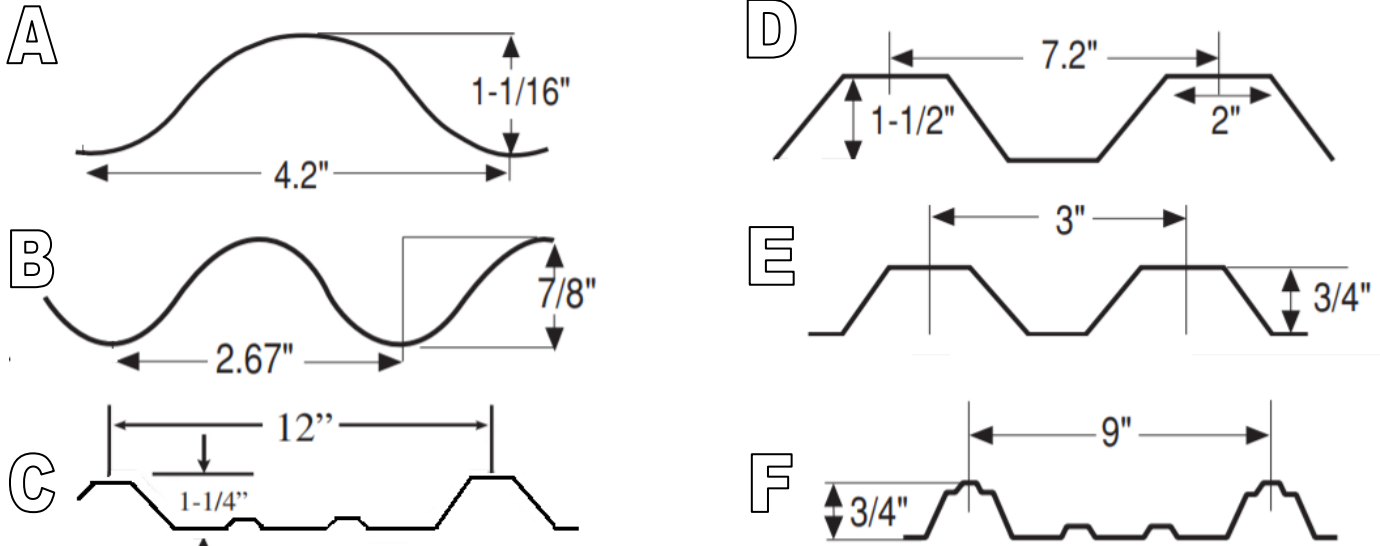

SPECIFICATIONS:: Corrugated panels, provided in standard lengths of 12' can be special ordered in 8'-24' lengths. Soft white panels offer 85% light transmission. Made of high impact polycarbonate, PVC or FRP (fiberglass reinforced plastic) panels have the lowest yellowing index, highest load rating, highest resistance to wind uplift and able to withstand wide temperature range. Designed for use on corrugated metal roofs, ridge lighting and vertical wall glazing. Provides UV protection while admitting 85% of light transmission while preventing heat loss at night. UL 580 Class 90 Classified. Ridge Caps standard 24" Wide, 10'6" Long and 0.039" Thick. If you need us to make custom skylight panels that are not in production any longer—we need either a piece of the profile or a template of it.

PANEL DESCRIPTION						
Name	Width	Lengths Up To	Thickness (in.)	Colors	Oz.	Material
4.2 (U-PANEL)	42"	38'	0.060	WHITE, CLEAR, GREEN	7	FRP, PVC, POLYCARBONATE
U-PANEL	40"	38'		GREEN		
R-PANEL	38"	40'		CLEAR, WHITE, SOFT WHITE		
U-PANEL	49.6"	20'		CLEAR, WHITE, SOFT WHITE		
SMALL U-PANEL	26"	12'		WHITE, CLEAR, RED		
SUNSKY 9" RIB	38"	16'		BRICK, GREY, CREAM, GREEN		

PANEL	PANEL QUANTITY	RIDGE CAP QUANTITY
A		
B		
C		
D		
E		
F		

WE DO NOT RECOMMEND 0.030" PANELS FOR ROOF APPLICATIONS

PROJECT NAME	PO / JOB #	LEAD TIME (IN WEEKS)	TODAY'S DATE
PROJECT DELIVERY ADDRESS	CITY / STATE / ZIP	SITE CONTACT / PHONE	
REQUESTED BY	PHONE	COMPANY	
ADDRESS	CITY / STATE / ZIP	APPROVAL SIGNATURE	