



SELF-FLASHING DOUBLE DOMED OPERABLE

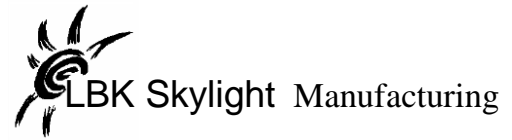

800.390.2301

www.LBKSkylight.com

SKYLIGHT DETAIL

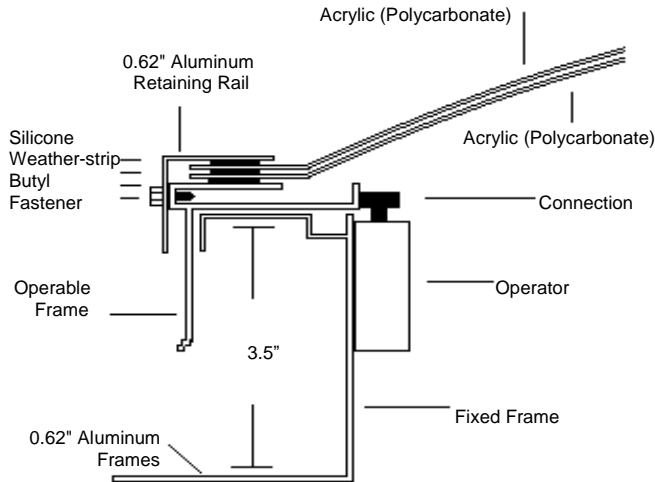

ALL OPERABLE SKYLIGHTS ARE LIMITED BY SIZE

SPECIFICATIONS: Self-Flashing Double Domed Operable Skylights are manufactured by LBK Skylight Manufacturing [(800) 390-2301]. Each skylight shall be factory assembled with one of the following glazing options: Acrylic—0.118" over 0.118" (standard duty), 0.187" over 0.118" (commercial duty) or 0.177" over 0.125" (100%DR Impact Modified Acrylic). Standard Polycarbonate to be 0.118" over 0.118"—whether it is polycarbonate over acrylic or polycarbonate over polycarbonate. Acrylic or standard polycarbonate standard color combinations to be 2447 white over clear or 2412 bronze over clear. Structured polycarbonate available in bronze, white (opal) or clear. Frames shall be .062" extruded aluminum (6063-T5) with welded corners and an integral condensation gutter. Finish shall be natural aluminum (mill), bronze or custom color. Skylight is designed and manufactured to meet or exceed standard of 40 psf live load and 20psf (uplift).

ALL UNITS ARE GUARANTEED AGAINST DEFECTIVE WORKMANSHIP AND MATERIAL.

DOME OPTIONS

MATERIAL	PLACEMENT	ACRYLIC			POLYCARBONATE	
		STANDARD	COMMERCIAL DUTY	100%DR	STANDARD	STRUCTURED
MATERIAL	OUTER					
	INNER					
	THIRD					
	THIRD					
COLOR	PLACEMENT	WHITE	BRONZE	CLEAR	OTHER (PLEASE SPECIFY)	
	OUTER					
	INNER					
	THIRD					
SHAPE	PLACEMENT	DOMED		PYRAMID	FLAT STRUCTURED	
	OUTER					
	INNER					
	THIRD					

FRAME OPTIONS

FINISH	<input type="checkbox"/> MILL	<input type="checkbox"/> BRONZE	<input type="checkbox"/> OTHER
--------	-------------------------------	---------------------------------	--------------------------------

PROJECT INFORMATION

PROJECT NAME
PROJECT ADDRESS
CITY/STATE/ZIP
DELIVERY ADDRESS
CITY/STATE/ZIP
PURCHASE ORDER / JOB #
CONTACT NAME
CONTACT NUMBER

LEAD TIME REQUEST / NOTES

SFOP_LSM 021418

MEASUREMENTS

QTY	ROUGH OPENING

CONTACT INFORMATION

REQUESTED BY
COMPANY
ADDRESS
CITY/STATE/ZIP
DATE
APPROVAL SIGNATURE